

LXinstruments GmbH
Rudolf-Diesel-Str. 36
71154 Nufringen
Germany



TECHNICAL PRODUCT INFORMATION

Test & measurement instruments

- ▶ high - quality
- ▶ moderate prices
- ▶ excellent precision

Your contact:

Technical support, services, demo & rental equipment, price information
& quotes, consulting:


Tel.: +49(0)7032 / 895 93-3

Mail: sales@lxinstruments.com

Web: www.lxinstruments.com

Shop: www.lxinstruments.com/shop

MULTIPLE OUTPUT PROGRAMMABLE LINEAR D.C. POWER SUPPLY

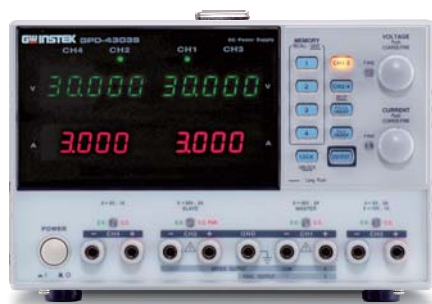

GPD-2303S/3303S/4303S GPD-3303D

FEATURES

- 2,3, and 4 Independent Isolated Output
- 4 LED Display Sets : 3 Digits After Decimal Point (GPD-2303S/3303S/4303S)
- Minimum Resolution :
GPD-2303S/3303S/4303S (1mV/1mA)
GPD-3303D (100mV/10mA)
- Digital Panel Control (Rotary Encoder Switch, Rubber Key With Indicator)
- User-Friendly Operation, Coarse / Fine Volume Control
- 4 Sets Save / Recall
- Key-Lock
- Output ON/OFF
- Tracking Series and Parallel Mode
- Smart Cooling Fan Achieving Low Noise
- Compact Design
- PC Software & USB Driver
- USB Standard Interface
- Optional European Jack Type Terminal



The GPD-Series contain the superior technology and high quality which GW Instek had established through its long history of power supply design and manufacturing. The GPD-Series offers digital panel control, large display, bright LED indicators, high output resolution, 4 sets of setup memory, USB remote control and smart cooling fan control. Additionally, the GPD-Series provide easy operation, a wide selection of panel settings and the most important for a reasonable price. All these features make the GPD-Series the most promising new comer in the power supply market.

High Resolution

With 1mV/1mA (for GPD-2303S/3303S/4303S) high resolution and coarse/fine volume control the GPD-Series, guarantees clean and stable output. Using the GPD-Series you can easily simulate the device under test's accurate behavior against small changes in voltage or current, which is impossible when using a low resolution power supply.

Tracking Series and Parallel Function

Tracking series and parallel function allows you to use the GPD-Series in wide range of applications. The tracking series mode guarantees higher output voltage, while the tracking parallel mode guarantees higher output current.

Convenience Functions

The knobs are digitally controlled, allowing fine or coarse volume setting. The key lock feature locks panel operations, preventing accidental change of the settings which might lead damaging for the equipments.

4 Sets of Save / Recall

The GPD-Series can save and recall panel settings, these feature which can not offered by general power supplies. You can quickly select a panel setting from four memory sets without manual configuration.

USB Remote Control

The USB device port in the GPD-Series allows you to remotely control the power supply according to your application needs.



FUNCTION FEATURES

1. Bright LED display shows settings or actual level of output
2. The independent CH3 output offers three commonly used voltage settings (GPD-3303S/3303D only)
3. C.V./C.C. modes are clearly indicated in different colors
4. Smart cooling fan control offers a well-balanced cooling mechanism, ensuring quiet operation
5. The tracking series and parallel mode can be selected with a single touch
6. Indicators embedded in the keys provide an instant view of the power supply status; the Key Lock feature prevents improper operation

APPLICATIONS

- Laboratories and Educational Facilities
- Product Testing and Quality Assurance
- Service Operation and Post-Sales Support
- Product Development and Debugging

SPECIFICATIONS

OUTPUT	Channel Voltage Current	GPD-2303S		GPD-3303S			GPD-4303S				GPD-3303D			
		CH1	CH2	CH1	CH2	CH3	CH1	CH2	CH3	CH4	CH1	CH2	CH3	
		0~30V	0~30V	0~30V	0~30V	2.5/3.3/5.0V	0~30V	0~30V	0~5V or 5.001V~10V	0~5V	0~30V	0~30V	2.5/3.3/5.0V	
		0~3A	0~3A	0~3A	0~3A	3A	0~3A	0~3A	0~3A or 0~1A	0~1A	0~3A	0~3A	3A	
CONSTANT VOLTAGE OPERATION	Regulation	Line regulation $\leq 0.01\%+3mV$ Load regulation $\leq 0.01\%+3mV$ (rating current $\leq 3A$); $\leq 0.02\%+5mV$ (rating current $>3A$)												
	Ripple & Noise	$\leq 1mVrms$ (5Hz~1MHz)												
	Recovery Time	$\leq 100\mu s$ (50%Load change, Minimum load 0.5A)												
	Temp.Coefficient	$\leq 300ppm / ^\circ C$												
CONSTANT CURRENT OPERATION	Regulation	Line regulation $\leq 0.2\%+3mA$, Load regulation $\leq 0.2\%+3mA$												
	Ripple Current	$\leq 3mA_{rms}$												
TRACKING OPERATION	Regulation of PAR.	Line regulation $\leq 0.01\%+3mV$ Load regulation $\leq 0.01\%+3mV$ (rating current $\leq 3A$) $\leq 0.02\%+5mV$ (rating current $>3A$)												
	Regulation of SER.	Line regulation $\leq 0.01\%+5mV$ Load regulation $\leq 100V$												
	Tracking Error	$\leq 0.1\%\pm 10mV$ (10 ~ 30V)no load, with load added load regulation $\leq 100mV$												
METER	Display	Voltage : 5 digits 0.4" LED Display (full scale:32V) Current : 4 digits 0.4" LED Display (full scale:3.2A)								Voltage:3 digits 0.4" LED Display Current:3 digits 0.4" LED Display				
	Resolution	Voltage : 1mV Current : 1mA								Voltage:100mV Current:10mA				
	Program Accuracy(25$\pm 5^\circ C$)	Voltage : $\pm(0.03\%$ of RDG +10 digits) Current : $\pm(0.3\%$ of RDG +10 digits)								Voltage: $\pm(0.5\%$ of RDG+2 digits) Current: $\pm(0.5\%$ of RDG+2 digits)				
	Readback Accuracy(25$\pm 5^\circ C$)	Voltage : $\pm(0.03\%$ of RDG +10 digits) Current : $\pm(0.3\%$ of RDG +10 digits)								Voltage: $\pm(0.5\%$ of RDG+2 digits) Current: $\pm(0.5\%$ of RDG+2 digits)				
CH3 SPECIFICATIONS	Output Voltage	-		(2.5V/3.3V/5V) $\pm 8\%$			0~5V / 5~10V				(2.5V/3.3V/5V) $\pm 8\%$			
	Output Current	-		3A			0~3A / 0~1A				3A			
	Regulation(25$\pm 5^\circ C$)	-		Line regulation $\leq 0.01\%+3mV$ Load regulation $\leq 0.01\%+3mV$			Line regulation $\leq 0.01\%+3mV$ Load regulation $\leq 0.01\%+3mV$				Line regulation $\leq 0.01\%+3mV$ Load regulation $\leq 0.01\%+3mV$			
	Repple & Noise	-		$\leq 1mVrms$ (5Hz~1MHz)			$\leq 2mVrms$ (5Hz~1MHz)				$\leq 1mVrms$ (5Hz~1MHz)			
KEY LOCK	Yes													
MEMERY SAVE/RECALL	4 sets													
POWER SOURCE	AC100V/120V/220V/230V $\pm 10\%$, 50/60Hz ; Power consumption : 490VA max.													
DIMENSION & WEIGHT	210(W) x 130 (H) x 265(D) mm ; Approx. 7kg													

Specifications subject to change without notice. PD-X303DGD4D4H

ORDERING INFORMATION

GPD-2303S	2 Channels, 180W Programmable Linear DC Power Supply
GPD-3303S	3 Channels, 195W Programmable Linear DC Power Supply
GPD-4303S	4 Channels, 195W Programmable Linear DC Power Supply
GPD-3303D	3 Channels, 195W Programmable Linear DC Power Supply

ACCESSORIES

User Manual x 1 , Power cord x 1	
GPD-2303S	Test Lead GTL-104Ax2;European Test Lead GTL-204Ax2, GTL-201Ax1
GPD-3303S	Test Lead GTL-104Ax2,GTL-105Ax1;European Test Lead GTL-203Ax1,GTL-204Ax2,GTL-201Ax1
GPD-4303S	Test Lead GTL-104Ax2,GTL-105Ax2;European Test Lead GTL-203Ax2,GTL-204Ax2,GTL-201Ax1
GPD-3303D	Test Lead GTL-104Ax2,GTL-105Ax1;European Test Lead GTL-203Ax1,GTL-204Ax2,GTL-201Ax1

OPTIONAL ACCESSORIES

GTL-246	USB Cable
FREE DOWNLOAD	
PC Software	PC Software including Data Log
Driver	Labview Driver

Global Headquarters

GOOD WILL INSTRUMENT CO., LTD.

No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan
T +886-2-2268-0389 F +886-2-2268-0639
E-mail: marketing@goodwill.com.tw

China Subsidiary

GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.

No. 521, Zhujiang Road, Snd, Suzhou Jiangsu 215011 China
T +86-512-6661-7177 F +86-512-6661-7277

Malaysia Subsidiary

GOOD WILL INSTRUMENT (SEA) SDN. BHD.

No. 1-3-18, Elit Avenue, Jalan Mayang Pasir 3,
11950 Bayan Baru, Penang, Malaysia
T +604-6111122 F +604-6115225

Europe Subsidiary

GOOD WILL INSTRUMENT EURO B.V.

De Run 5427A, 5504DG Veldhoven, THE NETHERLANDS
T +31(0)40-2557790 F +31(0)40-2541194

U.S.A. Subsidiary

INSTEK AMERICA CORP.

5198 Brooks Street Montclair, CA 91763, U.S.A.
T +1-909-399-3535 F +1-909-399-0819

Japan Subsidiary

TEXIO TECHNOLOGY CORPORATION.

7F Towa Fudosan Shin Yokohama Bldg., 2-18-13 Shin
Yokohama, Kohoku-ku, Yokohama, Kanagawa,
222-0033 Japan
T +81-45-620-2305 F +81-45-534-7181

Korea Subsidiary

GOOD WILL INSTRUMENT KOREA CO., LTD.

Room No.503, Gyeonginro 775 (Mullae-Dong 3Ga,
Ace Hightech-City B/D 1Dong), Yeongduengpo-Gu,
Seoul 150093, Korea.
T +82-2-3439-2205 F +82-2-3439-2207

India Subsidiary

GW INSTEK INDIA LLP.

No.2707/B&C, 1st Floor UNNATHI Building,
E-Block, Sahakara Nagar, Bengaluru-560 092, India
T +91-80-6811-0600 F +91-80-6811-0626

GW INSTEK

Simply Reliable



Website



Facebook



LinkedIn