

TECHNICAL PRODUCT INFORMATION

Electrochemical instruments

- high - quality
- moderate prices
- excellent precision

Your contact:

Technical support, services, demo & rental equipment, price information & quotes, consulting:

Tel.: +49(0)7032 / 895 93-2

Mail: info@ektechnologies.de

Web: www.ektechnologies.de

Shop: www.lxinstruments.com/shop/elektrochemie/


Potentiostat – Galvanostat

± 10 nA to ± 1 A / ± 15 V / ± 20 V



POTENTIOSTAT
GALVANOSTAT
T°C PROBE
BATTERY HOLDER

OrigaMaster 5

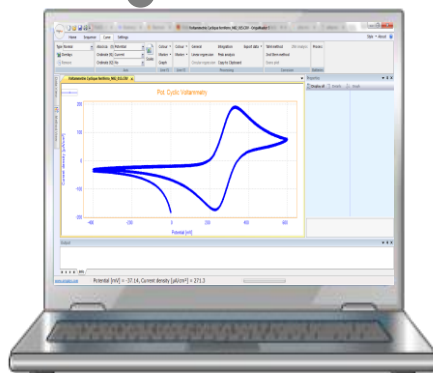

Licence free software
Windows XP, Vista, 7, 8 and 10.

EASY TO USE

How it works

To supply the system, there are two possibilities, depending on your needs...

OGFDRV – DRIVE UNIT – MULTI-CHANNEL CONFIGURATION



- ✓ Power supply
- ✓ Control of channels
- ✓ Built-in dummy cell



Use an "OGFDRV - Drive Unit", from one channel and to extend it in the future.

For instance:
5 channels 500 mA (OGF500)
+
One EIS module

OGFPWR – POWER SUPPLY – FOR SINGLE-CHANNEL



- ✓ Power supply
- ✓ For only one channel
- ✓ And one OGFEIS



Consult our different Pack OGF:



Pack OGF500



Pack OGF01A



Pack OGF05A



Pack OGF10A

For instance:
One channel 500 mA
+
One EIS module
or
One channel 500 mA
=
Pack OGF500



The OGF01A combines compactness, performance and accurate price. It is a 1A potentiostat/galvanostat which can be complemented by one Impedance module OGFEIS.

His handle allows you to carry it easily and everywhere.

Connected to a Drive Unit OGDRV, it becomes a Multi-Channel system.


Built-in modularity:

1. Standalone Potentiostat & Galvanostat
2. Temperature measurement
3. Battery Holder Connector
4. Analog I/O to connect external devices
5. USB control

Main Technical Specifications

Electrode connections	2, 3 and 4
Max applied potential	±15 V
Compliance voltage	±20 V
Maximum current	±1 A
Current ranges	±10 nA to ±1 A in 9 decades
Potential accuracy	< 0.1 % FSR (Full Scale Range)
Potential resolution	450 μ V on ±15 V
Current accuracy	< 0.1 % FSR
Current resolution	0.003 % FSR (Best: 300 fA)
Input impedance	1 T Ω (//20 pF)
Potential bandwidth	1 MHz
Computer interface	USB 2.0
Software	OrigaMaster

Optional items

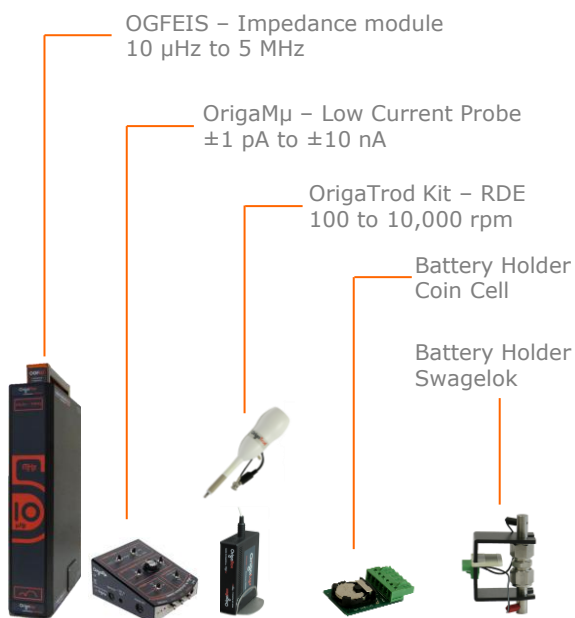

OrigaMaster's Methods

VOLTAMMETRY

Pot. Cyclic Voltammetry (CV)	✓
Pot. Advanced Cyclic Voltammetry	✓
Gal. Cyclic Voltammetry	✓
Pot. Linear Voltammetry	✓
Pot. CV 4 limits	✓
Pot. Interactive CV	x
Staircase Voltammetry (SCV)	✓

CHRONO

Open Circuit Potential (OCP)	✓
Chrono Amperometry (CA)	✓
Chrono Amperometry expert	✓
Chrono Coulometry (CC)	✓
Chrono Potentiometry (CP)	✓
Chrono Potentiometry expert	✓
Interactive Potentiometry	x
Single Chrono Amperometry	✓

IMPEDANCE (with the OGFEIS module)

Pot. Dynamic EIS	✓
Pot. Fixed Frequency EIS (Capacitance)	✓
Pot. Fixed Frequency EIS vs Time (HFR)	✓
Gal. Dynamic EIS	✓

CORROSION

Pitting corrosion	✓
General corrosion (Rp)	✓
Coupled corrosion (Evans)	✓
Polarization for corrosion (Tafel)	✓
Zero Resistance Ammeter (ZRA)	x

PULSE

Pot. Differential Pulse (DPV)	✓
Gal. Recurrent Differential Pulse	✓
Pot. SW Voltammetry (SWV)	✓
Potentiometric Stripping Analysis (PSA)	x

BATTERIES and SUPER CAPACITORS

Single Charge or DisCharge	✓
Gal. Charge and DisCharge Cycle	✓
Expert Charge and DisCharge Cycle	✓
PITT	✓
GITT	✓
Constant Power	✓
Profile Generator	✓
Internal Resistance	✓

AR01260 – 23/09/2020

Country Representative

OrigaLys ElectroChem SAS

Les Verchères 2
62A, avenue de l'Europe
69140 RILLIEUX-la-PAPE
FRANCE

☎ +33 (0)9 54 17 56 03

☎ +33 (0)9 59 17 56 03

contact@origalys.com

