

LXinstruments GmbH  
Rudolf-Diesel-Str. 36  
71154 Nufringen  
Germany



## TECHNICAL PRODUCT INFORMATION

### Test & measurement instruments

- ▶ high - quality
- ▶ moderate prices
- ▶ excellent precision

#### **Your contact:**

Technical support, services, demo & rental equipment, price information  
& quotes, consulting:

Tel.: +49(0)7032 / 895 93-3

Mail: [sales@lxinstruments.com](mailto:sales@lxinstruments.com)

Web: [www.lxinstruments.com](http://www.lxinstruments.com)


Shop: [www.lxinstruments.com/shop](http://www.lxinstruments.com/shop)

## UHPC Thermal Chamber

### UHPC Thermal Chamber – Accuracy, Stability and Reliability

Paired with Ultra-High Precision Coulometry (UHPC) Channel Modules, these Thermal Chambers complete our turnkey UHPC offering and keep your testing programs on track. Various chamber options are available to meet your test temperature, cell format, and available power supply requirements.

#### 16-Position, 2A/10A WRC

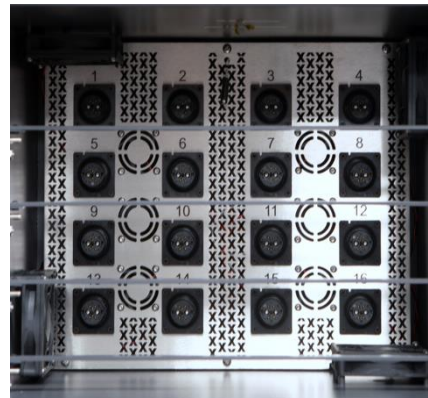

Set Point Temperature Range	-20°C to 60°C
Accuracy (Stability) at 20°C	±1.0°C (±0.1°C)
Current Rating	Up to 14A
Accuracy (Stability) at 0°C	±0.7°C (±0.06°C)
Required Lab Temp Range (Stability)	18°C to 28°C (±1°C)
Heating Method	Resistive
Cooling Method	Condensing Unit
Standard Rack Mountable (Size)	Yes (10U)
External Depth, inches (mm)	37.8 (961)

*\*Note: NOVONIX UHPC Thermal Chambers can be used with other cyclers available in the market.*

Contact us to learn how UHPC technologies can improve your battery development, manufacturing, selection and more: [bts-sales@novonixgroup.com](mailto:bts-sales@novonixgroup.com)