

LXinstruments GmbH
Rudolf-Diesel-Str. 36
71154 Nufringen
Germany



TECHNICAL PRODUCT INFORMATION

Test & measurement instruments

- ▶ high - quality
- ▶ moderate prices
- ▶ excellent precision

Your contact:

Technical support, services, demo & rental equipment, price information
& quotes, consulting:

Tel.: +49(0)7032 / 895 93-3


Mail: sales@lxinstruments.com

Web: www.lxinstruments.com


Shop: www.lxinstruments.com/shop

Bidirectional Programmable AC Source-load System

— G6000 Series —

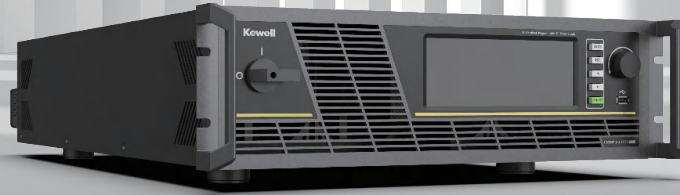


Kewell G6000 series is a four-quadrant AC source-load system featuring high precision, high power density, and high dynamic response. As source, it supports three-phase independent adjustment, LIST/PULSE/STEP modes, and simulation of grid disturbances and exceptions to test the grid tolerance of the DUT. As load, it has multiple built-in AC load models to simulate linear loads. The G6000 series supports AC/DC/AC+DC output, waveform editing, harmonic/inter-harmonic injection, as well as standard HVRT/LVRT curves of China, Europe, the U.S., etc., meeting varied test requirements.



18kVA in 3U

Ultra-high power density



Multiple Modes

LIST/STEP/PULSE/Harmonic



1ms

Simulation of transient grid interruptions



AC & DC in one

AC√ DC√ AC+DC√




Built-in standard curves

One-click to call built-in HVRT/LVRT waveforms and harmonic waveforms



3V/μs

Microsecond voltage response



Parallel

Flexible paralleling for higher power



Efficiency ≥ 88%


Lower carbon emissions

KEWELL TECHNOLOGY CO., LTD.

<https://www.kewelltest.com/>

sales2@kewell.com.cn

(QR code) >>



Normal

Fundamental,
Cost-effective



Pro

Fully-featured,
Multi-scenario



Ultra

Ultimate experience,
Lab testing-oriented

G6000 Series						
Function Params		Version		Normal	Pro	Ultra
Model	18kW	450V	90A	●	●	●
	6kW	450V	90A	●	●	●
Functions	Bidirectional			-	●	●
	Unidirectional			●	-	-
	AC			●	●	●
	DC			-	●	●
	AC+DC			-	●	●
	LIST/Pulse/Step			-	●	●
	Waveform editing			-	●	●
	Harmonic mode			-	●	●
	Inter-harmonics mode			-	●	●
Output parameters	Voltage accuracy				≤0.05%+0.05%F.S.	
	Current accuracy				0.1%+0.1%F.S.	
	Voltage slew rate				3V/us	
	Frequency range				15Hz ~ 200Hz	
	Frequency accuracy				0.01%	
	U _{THD}				< 0.5%@50Hz/60Hz	
					< 1%@15Hz ~ 200Hz	
	Harmonic order				Any voltage harmonics can be edited 2-100 times (5kHz max)	
	Harmonic content				50%	
	Range of phase setting				0 ~ 359.9°	
Input parameters	Grid voltage				342 ~ 528V	
	Grid frequency				47-63Hz	
	Operating temperature				0 ~ 40°C	
General parameters	Dimensions				699(D)*445(W)*133(H)	

Note: ● come with standard equipment - none

